## Fast

## Floor Type Cabinet



## 1. Feature:

Exquisite design with precise craftsmanship;

Welded steel fame for front and back part, can be flat packing, easy to transfer;

Arc shaped vented front door with hexagonal holes, can turn over 180 turning degree;

Vented rear door with hexagonal holes;

Removable side panel with latch, easy to install, option lock;

Adjustable feet and castors are available simultaneously;

Cable entry on the top, adjustable cable entrance at the bottom with panel;

Advanced handle locks for front door, option! other lock;

S-shaped mounting profile, free to move forward and back;

Efficient baying kit of cabinet on floor; earthing kit;

Optional plinth to fix cabinet on floor; under base cale entry;

Various optionI Accessories for common using;

Unassembled packing, about 2/5 of original olume, save container space;

## 2. Standard:

Comply with ANS/EIA RS-310-D,IEC297-2,

DIN41491, PART7, DIN41491, PART7, ETSI Standard;

Material:

SPCC quality cold rolled steel

Thickness: Mounting profile: 2.0 mm;

mounting angle:1.5mm; other 1.2mm;


Loading Capacity;

static loading:800kg (on the adjustable feel)

Degree of protection:lp20

Surface finish:

Degreaseing, pickling, Phosphating, Powder Coated;

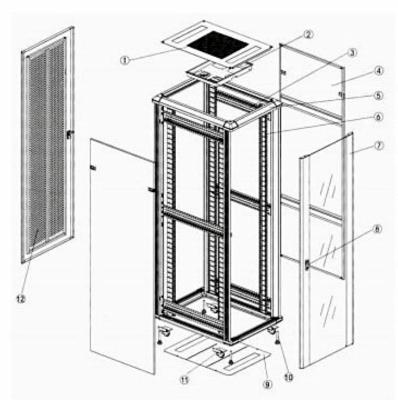

- 1.Top cover
- 2.Fan unit (Option)
- 3. Mounting angle
- 4. Side panel (option lock)
- 5.Aluminum alloy frame
- 6. Mounting profile
- 7. Tempered glass (front door)
- 8.Advanced moon-shaped lock
- 9.Bottom panel
- 10.Adjustable feet
- 11.2" castor
- 12. Perforated door (rear door)







