


10C FTTH Fiber distribution box FL-H008

1. Description:

The FL-H008 10C fiber optic distribution box serves as the termination point for feeder and branch cable connections in FTTx communication network systems. Fiber optic splicing, splitting, and distribution can all be completed within this box, providing robust protection and management for FTTx network construction. Suitable for indoor and outdoor wall-mounted or pole-mounted installation.

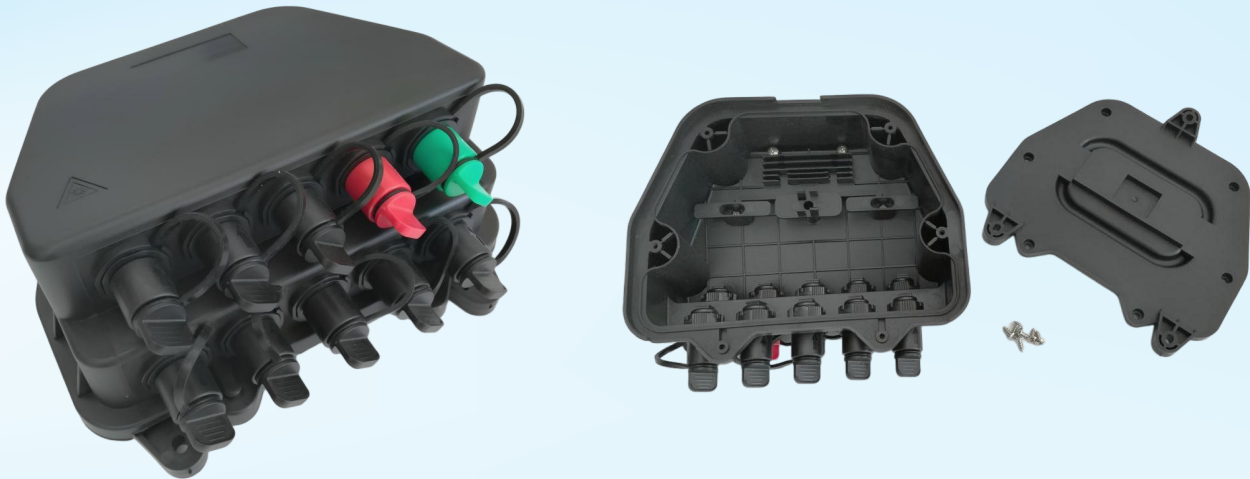

2. Features:

1. Made of high-quality engineering plastics, with an attractive appearance and excellent workmanship.
2. The FL-H008 10C can be equipped with 10 Mini SC adapters or 10 Tyco adapters; It can be equipped with 8 Tyco adapters and 2 Mini SC adapters.
3. Can install 1 mini type 1*8 PLC splitter, 2 mini type 1*4 PLC splitters, or 1 1*2 FBT-1*8 PLC splitter.
4. Full curvature radius control ensures that the curvature radius of the optical fiber is greater than 30mm at any position.
5. Supports wall-mounted or pole-mounted installation.
6. Waterproof rating: IP68.

3. Specification:

Connector attenuation (insert, swap, repeat) 0.3dB. Echo loss	APC≥60dB, UPC≥50dB
Major mechanical performance parameters Connector plug and plug durability life	> 1000 times
Environmental requirements	
Operating temperature	:-40℃ ~ + 60℃;
Storage temperature	:-25℃ ~ + 55℃



Relative humidity	95% (+ 30℃)
Atmospheric pressure	62 ~ 101 kPa
Junction box Material	ABS+PC
Waterproof	IP68
Size	250.4*209*86mm

5. Product display:

